


SINGLE CHANNEL SHAFT ENCODERS (USUALLY CURRENT SINK)				
PIN	DYNALCO (CMI) PG278	RED LION RFG's	DYNAPAR 'GUBE' SERIES 21/22	DYNAPAR ACCUCODER MODEL 711
A	120 VAC	PWR SOURCE	SIGNAL COMMON	SIGNAL OUT
B	120 VAC	COMMON	POWER SOURCE	POWER SOURCE
C	NO CONNECTION	SIGNAL OUT	CASE GROUND	SIGNAL OUT
D	SIGNAL OUTPUT	SIGNAL OUT	SIGNAL OUT	POWER SOURCE
E	SIGNAL COMMON	CASE GROUND	SUPPLY COMMON	SUPPLY COMMON
F	CASE GROUND	CASE GROUND	SUPPLY COMMON	SUPPLY COMMON

**TAIL-SHAFT TACH'S**  
 NOTE:  
 RED LION DITAK-6 DIGITAL RPM DISPLAYS REQUIRE A ZENER DIODE (USUALLY 7V) IN SERIES WITH THEIR #2 INPUT WHEN USED WITH ANY ENCODERS THAT OUTPUTS OVER 5 V P-P SIGNAL.

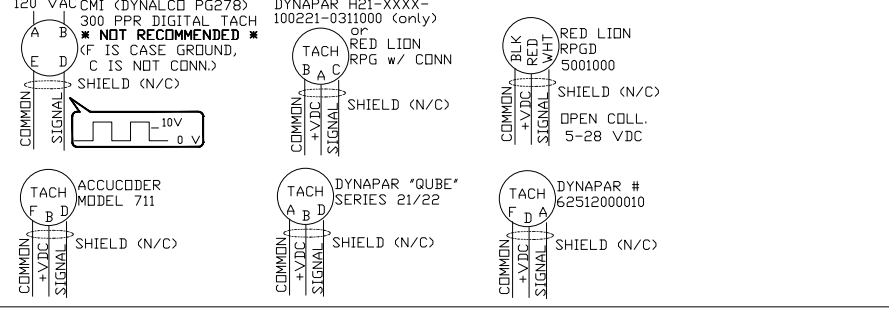

ADDITIONAL EZ-BLEND OR FEED BOARDS AS REQUIRED

TO OTHER INTER-FACE BOARDS AS REQUIRED.